THE BEST
SECURITY SOLUTION

HIP

ระบบประตูกั้นทางเดิน

HIGH SPEED SWING GATE

HIP D Series TECHNOLOGY

Model:

CMD702

นวัตกรรมประตูอัตโนมัติควบคุมด้วยระบบไฟฟ้า สามารถใช้เทคโนโลยีเครื่องอ่านการ์ดและอุปกรณ์ต่างๆเข้ามาเชื่อมต่อได้อย่างสมบูรณ์ใช้สำหรับการจัดการและควบคุมการเข้าออกประตูได้อย่างหลากหลาย มีระบบการป้องกันของตัวเครื่องที่เชื่อถือได้ สามารถแจ้งเตือนเหตุอลาร์มแบบเรียลไทม์ได้และมีการแนะนำทิศทางการเดินเข้าประตูด้วย ประตูอัตโนมัติมีการเชื่อมต่อสัญญาณไฟฟ้าที่ได้มาตรฐาน ซึ่งสามารถเชื่อมต่อกับเครื่องอ่านบัตรบาร์โค้ด Proximity , Mifare บัตรแถบแม่เหล็ก ง่ายและสะดวกในการควบคุมการเข้าออกของบุคคล

Running stable	Without noise	Safe and durable	Without mechanical impact	Self-check	Brush-less DC motor

office | Hotel | Data Room | Apartment | Cashbox Management | Custom | Villa | Bank

Copyright ©HIP GLOBAL All rights reserved.

ระบบประตูกั้นทางเดิน

HIGH SPEED SWING GATE

Model:

CMD702

As an intelligent pedestrian management device,the pedestrian barrier gate flap barrier or swing gate integrated mechanism, electronics,microprocessor control and different reading and writing technologies.The device works with different readers,equipped real-time alarming system and security protection devices,which will make the system working under intelligent control and management.

The outer casing is stamping forming made of stainless steel plate,it is anti-rust and durable,using standard electric connector,easily to integrated bar-code/IC/ID cards,make pedestrian in sequence and prohibit illegal person.Besides,the system equipped fire protection functions in case of any emergency to keep the pedestrian smoothly.

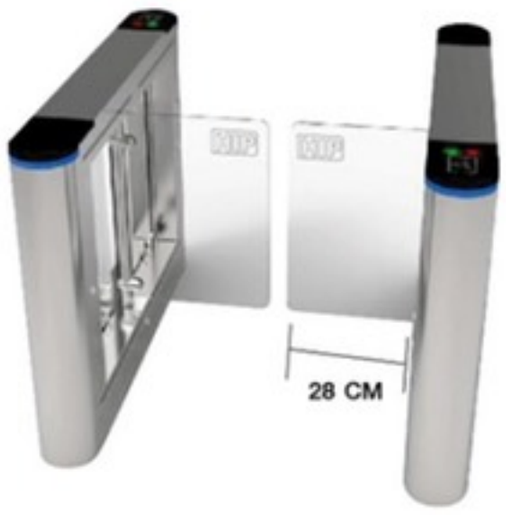

Size : 1400x185x1020mm
Unlock time: 0.2s
Pass rate: 28 mm
Pass width: <=900mm
Input : 100V~240V
Motor voltage: 24v
Environment: -25~+70
Power consumption:30w
Input: 12v dry contact

ระยะปีกกั้นมาตราฐาน อยู่ที่ 28 CM

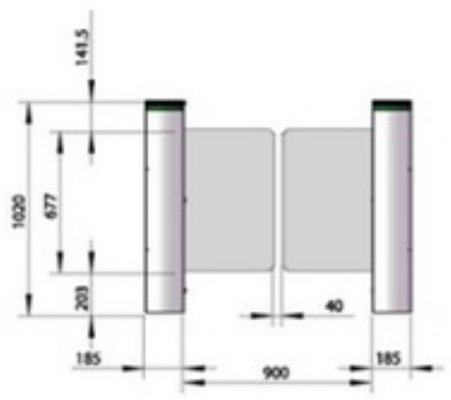

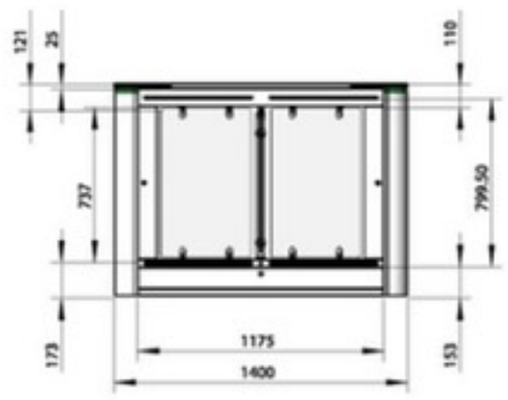

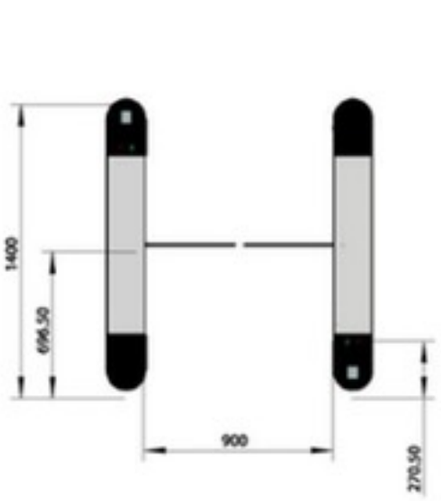

Functions

1 Zero position self-inspection function,convenient for using and maintenance.

2 Alarming reminding function in case of illegal intrusion.

3 Anti-collision function.Retractable flaps /rotating swings will be locked and not work until they receive unlocking signal.

4 Infrared/Mechanical anti-pinch function.The motor will automatically stop working and send alarming signal when the flaps/swings meet resistance during they are working.

5 Automatic reset function.The passing permission will be canceled automatically after it is activated but nobody passing within allowed time.

6 Standard outer electrical connecting interface. It can connect to multi card readers,can remotely control & manage through manager computer.

7 Stable system,little noise.

คุณสมบัติทางเทคนิค

Power	: AC220+-10% V, 50HZ
Motor	: swing gate : DC motor 24V/30W, 40K
สภาวะอุณหภูมิขณะทางาน	: -20˚C-60˚C
สภาวะความชื้น	: <=90%
รองรับอินพุท	: dry contact signal
การสื่อสาร	: RS485
ระยะการสื่อสาร	: <=1200 m
ความกว้างของเลน	: 300~900 mm
ระยะปีกกั้น	: ระยะปีกกั้นปกติของตัวเครื่องมาตราฐาน 28 mm

ออฟชั่น

1. ต่อกับเครื่องหยอดเหรียญ หรือระบบนับจำนวนคนได้
2. ระบบควบคุมประตูและเครื่องอ่านบัตร
3. ระบบทาบบัตรและเดินผ่าน
4. สั่งพิเศษเพิ่มความหนาของเนื้ออลูมิเนียม เพิ่มความคงทนได้

ขอสงวนสิทธิ์ในการเปลี่ยนแปลงรายละเอียดทั้งหมดโดยไม่ต้องแจ้งให้ทราบล่วงหน้าโดย บริษัท เอช ไอ พี โกลบอล จำกัด.

Copyright ©HIP GLOBAL All rights reserved.